


LED投光器


- ・ 91lm/Wの高効率LED。
- ・ CIR71。
- ・ 40,000時間の長寿命
- ・ ON/OFFの反応速度が速い。
- ・ 振動と衝撃に強い。
- ・ IP65。
- ・ SMSP内臓型/外付型。



SJ-FL-10F



SJ-FL-20F



SJ-FL-50F



SJ-FL-100F



SJ-FL-180F



SPECIFICATION

項目	規格				
消費電力	10W	20W	50W	100W	180W
入力電圧	85Vac ~ 305Vac				
周波数	47Hz ~ 63Hz				
力率	0.94<				
動作温度	-20℃~50℃				
保管温度	-40℃~85℃				
操作湿度	20%~95%				
色温度	3,000K / 5,000K / 5,700K				
CRI	72<				
総高速	740lm	1,521lm	4,314lm	9,944lm	16,218lm
光効率	71.8lm/W	78lm/W	84lm/W	96lm/W	91lm/W
照射角	115°				
大きさ	133*179*57mm	166*200*67mm	194*253*79mm	341*250*116mm	310*397*158mm
IP	65				
重さ	0.7Kg	2.1Kg	4.1Kg	8.0Kg	8.0Kg

LED投光器



SJ-FL-10F



SJ-FL-20F



SJ-FL-50F








SJ-FL-100F



SJ-FL-180F



ILLUMINATION

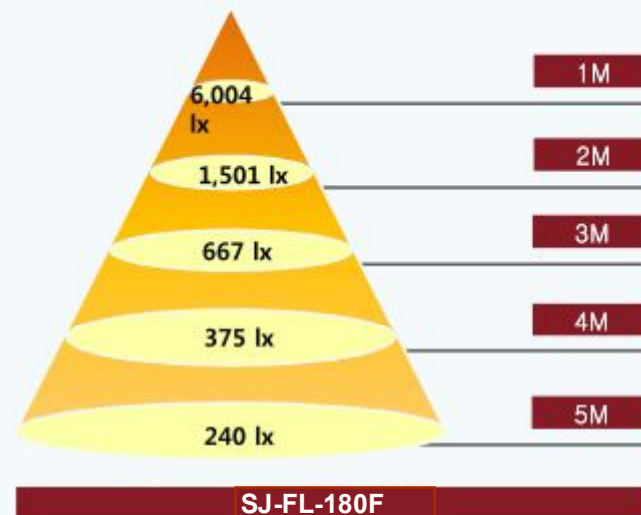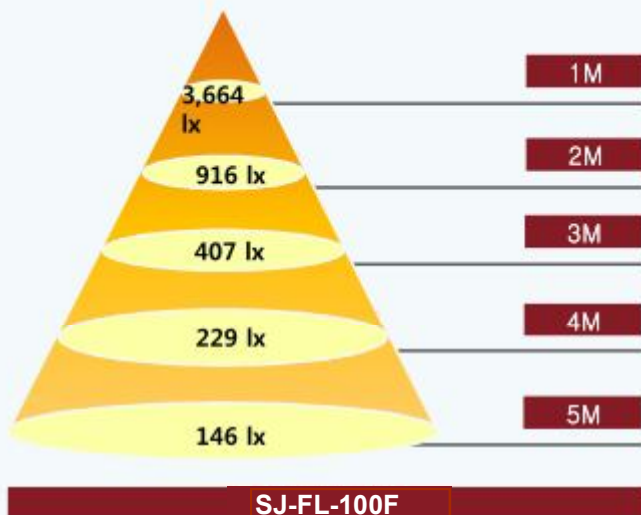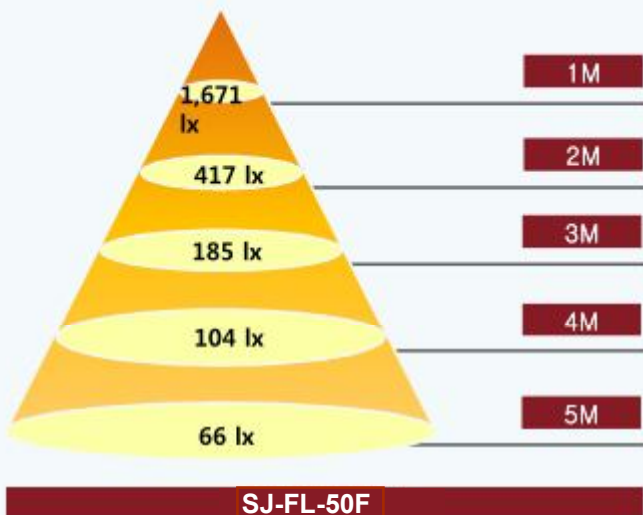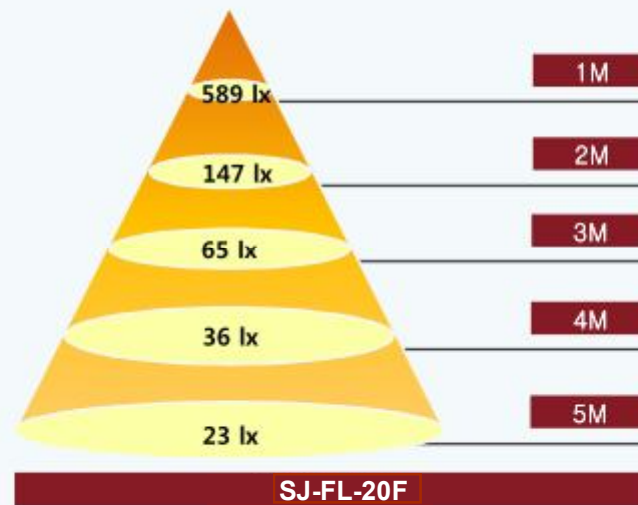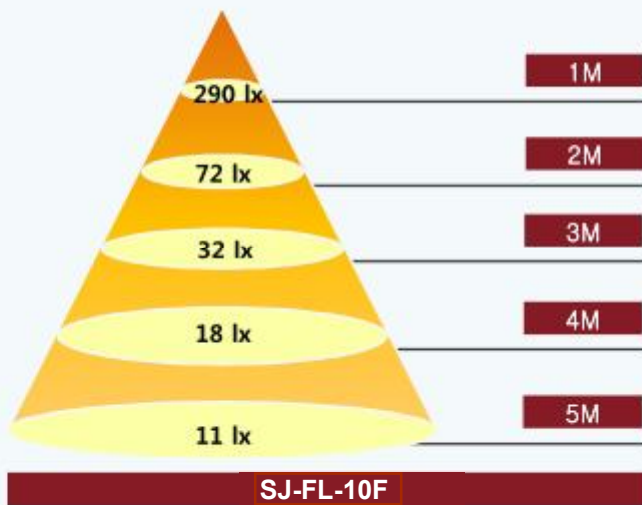


LED投光器



SJ-FL-10F



SJ-FL-20F



SJ-FL-50F




SJ-FL-100F




SJ-FL-180F




BEAM PROFILE

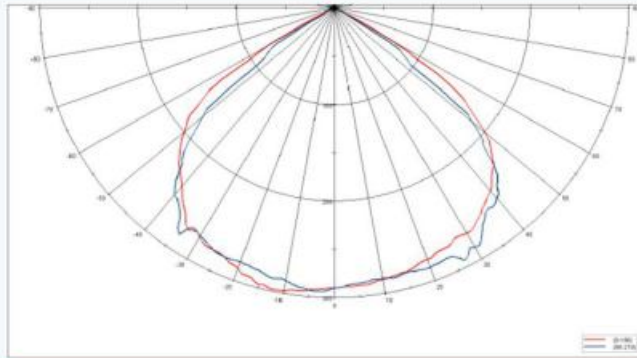


SJ-FL-10F

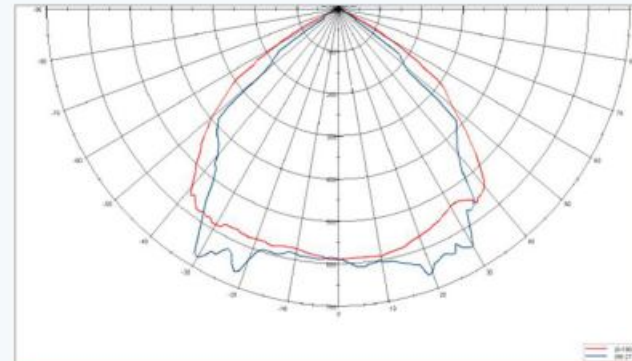


SJ-FL-20F

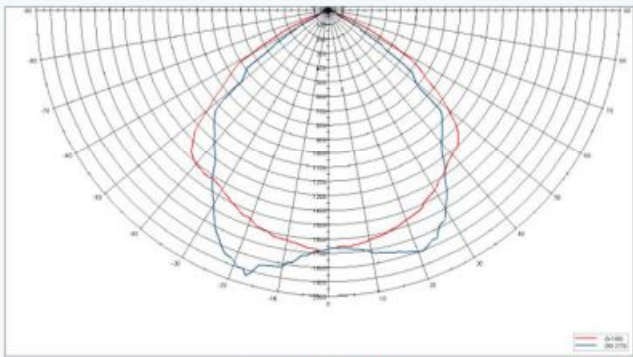

SJ-FL-50F

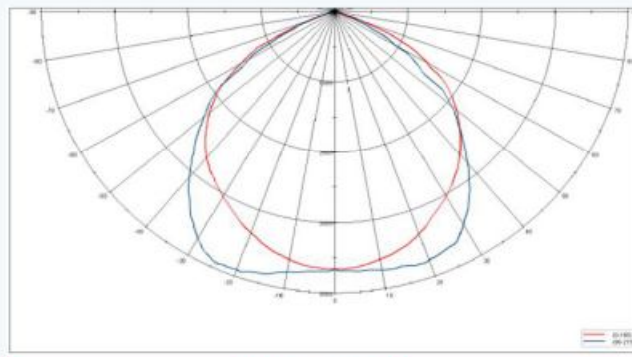


SJ-FL-100F

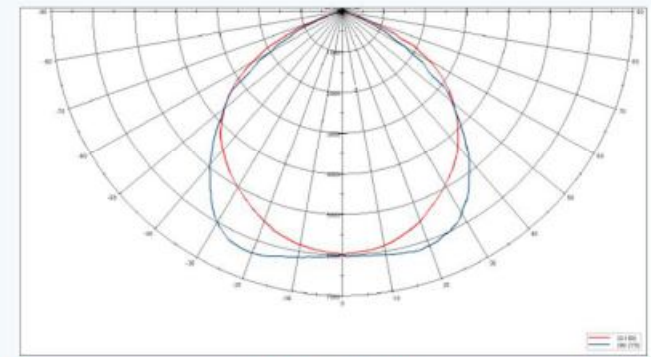

SJ-FL-180F


LED投光器




SJ-FL-10F



SJ-FL-20F



SJ-FL-50F




SJ-FL-100F




SJ-FL-180F




DRAWING

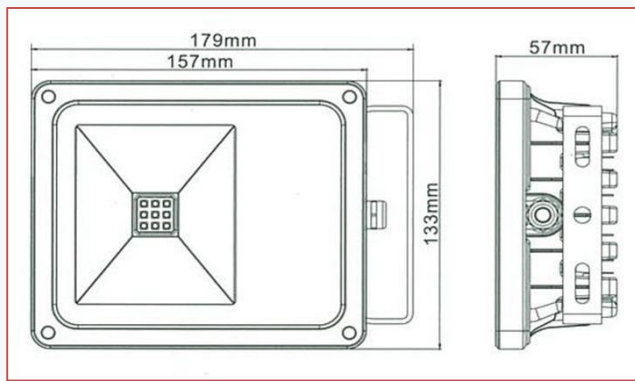


SJ-FL-10F

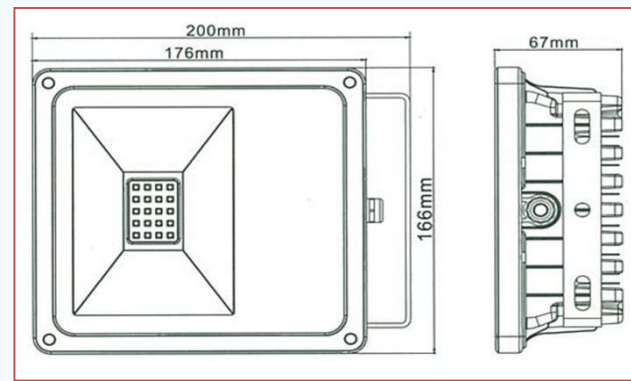


SJ-FL-20F

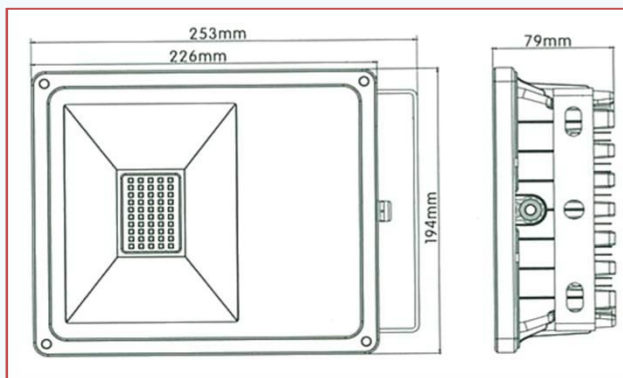

SJ-FL-50F

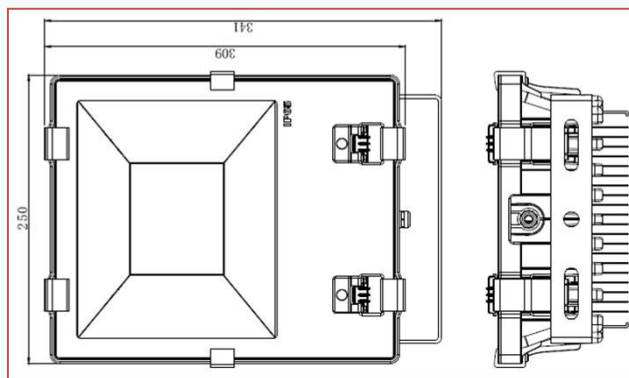

SJ-FL-100F

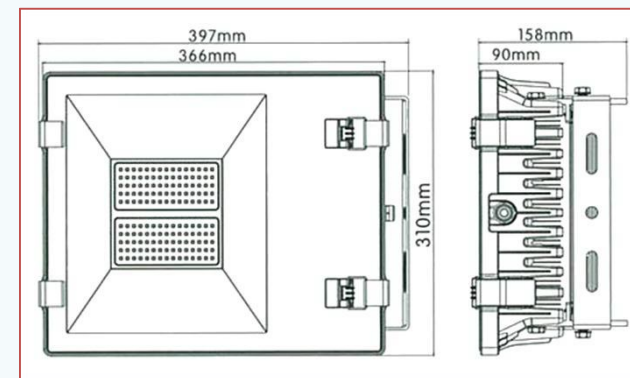

SJ-FL-180F